



尖端的真空设备 凯旭产品选型手册



姓名:陈强

微信:kaixuvac

电话:132-6865-5599

邮箱:chenqiang@kaixuvac.cn

网址:www.kaixuvac.com

地址:东莞市寮步镇寮步坑口振兴四巷3号

营业联系



EM双级旋片泵



EM单级和双级油封旋片泵具有高极限真空和快速抽空能力、静音操作以及尺寸紧凑等特点，在业内享有盛誉。事实证明，这些泵能够为一系列科学和实验室应用提供长期可靠的性能，并且非常适合与涡轮分子泵搭配使用。



产品特点

水蒸气处理能力高。


客户无需单独接线集成式IEC连接器。

强制空气冷却确保泵的表面温度较低。

宽电压电机覆盖全球主要国家。

可使用O形圈密封目视镜直接观察油的状况。

利用添加剂来延长使用寿命，同时也不会影响油的饱和蒸气压。

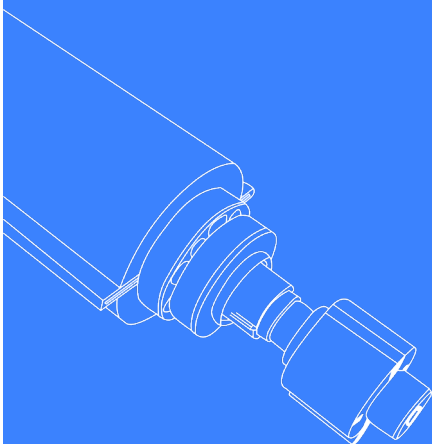

技术数据

真空数据	E2M 0.7	E2M 1.5	E1M 18	E2M 18	E2M 28
峰值抽速 (m3h1)	0.75	1.60	17	17	27.5
关气镇极限真空(mabr)	0.003	0.003	0.003	0.015	0.015
开气镇极限真空(mabr)	0.2	0.025	0.65	0.06	0.12
进气排气口法兰	NW10	NW210	NW25	NW25	NW25
推荐用油	UL15或GS-1	UL15或GS-1	UL19或GS-1	UL19或GS-1	UL19或GS-1
注油量 (L)	0.28	0.28	1.4	1.05	1.5
噪音 (db)	43	54	57	57	57
电机功率 (W)	90	160	550	550	750
电机转速 (rpm)	1400	1800	1400	1400	1400
重量 (KG)	10	10	37	39	44
外型尺寸 (mm)	323*166*142	323*166*142	504*251*170	550*251*170	584*251*170

- 1、测量的是全压力
- 2、如需获取更多详细资料请联系技术支持
- 3、技术电话：陈 强 132-6865-5599



24小时为客户提供服务

高效率

高品质

高服务

除了拥有出色的性能、效率及实用性的真空设备，我们也可以提供精湛的服务和支持。无论是在我们的服务中心还是您的现场，我们均可为多个品牌和应用提供服务。可以快速响应您的需求，就算是不间断工艺，也可让您安心生产。

In addition to vacuum equipment with excellent performance, efficiency, and practicality, we can also provide exquisite services. Service and support. Whether in our service center or on your site, we can serve multiple brands and applications. Provide services. We can quickly respond to your needs, even with uninterrupted processes, allowing you to produce with peace of mind.

你想了解更多吗？

请直接联系我们！

电话：132-6865-5599

邮箱：chenqiang@kaixuvac.cn



在线客服



营业联系